

## Power Sensor Accessories

### Thermal SmartSensor Adapter



Thermal SmartSensor Adapter

The Thermal SmartSensor Adapter converts LM-model position-sensing thermopiles and LM-2 optical sensors for use with FieldMaxII, FieldMate and EPM2000 meters.

Designed for use with multiple sensors, this adapter can read the sensor EEPROM contents and program itself when powered up via the meter connection.

Note: Beam position information is not available when using these meters.


Part Number	Description
1056827	Thermal SmartSensor Adapter

### 1000:1 Attenuator



1000:1 Attenuator

This attenuator is used with OP-2 VIS, LM-2 VIS, OP-2 IR and LM-2 IR sensors to allow operation up to 5W in the visible and 3W in the infrared regions. The attenuator threads into the sensor in place of the light shield to provide from 1100:1 to 950:1 attenuation. Each attenuator is calibrated for 1000:1  $\pm 5\%$  at 647 nm and is supplied with a calibration certificate. The useful spectral range is 400 to 1800 nm.

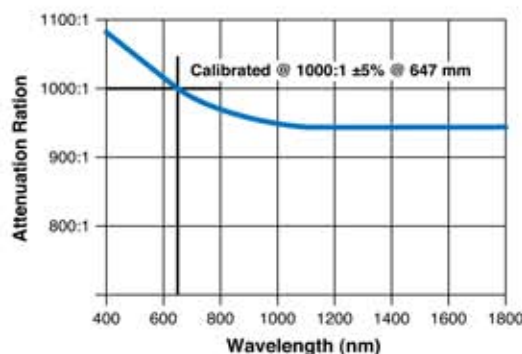

Part Number	Description
1098318	1000:1 Attenuator for OP-2 and LM-2 Sensors