

Description

A conventional power supply has a set max. voltage and a set max current such that all the operating V & A must fall inside these limits. For example a 20V max. and 16A max. power supply with 320W can only supply voltage and current within the above two limits of V & I. If you want to have 40V with smaller current (8A) or 20A with lower voltage (14V) you need to buy another power supply.


This completely new designed laboratory grade power supply differs from the conventional power supply by calculating and changing the voltage and current limit points according to the available max. power.

So the max limits of the voltage and current are changeable according to the rated power. In the above example, with the constant-power supply can give 16V max. with 20A max. or 42V with 8A max and etc. The combinations of max. V and I are greatly increased and so is the range of operational limits as shown in the hyperbolic graph of max. power voltage-ampere.

The key benefit is clear, it saves money as one constant-power power supply can do the work of a few conventional power supplies.

Features

- Saves money and space as one power supply covers V, A limits of few power supplies.
- Adjustable upper voltage and current output levels to ensure safe operation
- 3 user presets of frequently used V and A outputs
- 4 digit display of voltage and current
- Analogue Remote Control V, I & On-Off
- Ramp, Step, DC output with 3 presets
- Remote Programming with provided software & drivers via USB port
- Output on-off switch and control panel lock button for safer operation
- Over Temperature, Over Current, Over Voltage and Short Circuit Protection
- Universal Input 90 - 264Vac, 50 - 60Hz

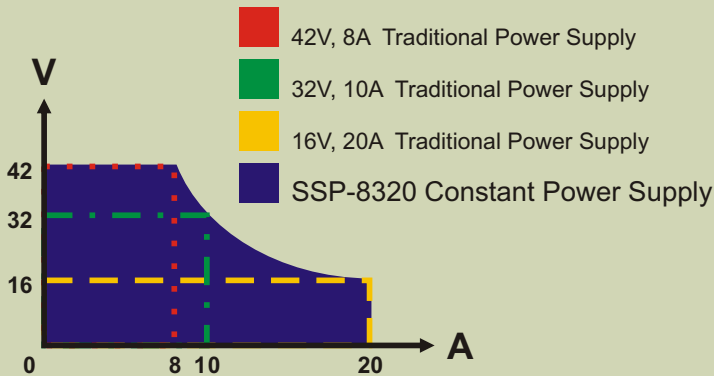

Specifications

Models	SSP - 8320	SSP - 8322
Input Voltage Range	100 - 240VAC	
No Load Input Current at 230VAC / 100VAC	≤0.3A	
Full Load Input Current at 230VAC / 100VAC	≤1.8A / ≤4.1A	
AC Input Frequency	45 - 65Hz~	
Efficiency (230VAC / 100VAC)	≥86/83% @ 42V / 7.6A	≥87/84% @ 84V / 3.8A
Power Factor	≥0.9	
OUTPUT:		
Variable Output Voltage	0 - 42V	0 - 84V
Variable Output Current	0 - 20A	0 - 10A
Output Rated Power	320W	
Constant Voltage Characteristics:		
Load Regulation (10 - 100% rated current)	≤120mV	≤100mV
Line Regulation (90 - 264Vac)	≤10mV	≤10mV
Ripple & Noise (peak-peak)	≤80mVp-p	
Ripple & Noise (r.m.s.)	≤8mV	
Constant Current Characteristics:		
Load Regulation (10 - 90% rated voltage)	≤50mA	
Line Regulation (90 - 264Vac)	≤10mA	
Meter Accuracy		
Volt. Meter Accuracy	±(0.1% +5counts)	
Curr. Meter Accuracy	±(0.1% +5counts)	
Resolution	0.02V 0.01A	
Output Setting Accuracy	Voltage: ±(0.2% +5counts)V Current: ±(0.2% +5counts)A	
Transient Response Time (step: 50%-100% rated load)	≤1.5ms	
Protection	Adjustable upper voltage limit, Short circuit, Overload, Over temp., Adjustable upper current limit, Tracking OVP	
Output Terminals	Safety Jack @ Front Panel	
Additional Function	3 User defined V & I preset, Remote control V, I & output on-off	
Remote Programmable via USB to Computer	Max. 20 preset of V & I, Max. preset cycle 999	
Ramp Step Irregular Waveform Functions	Yes	
Approvals	CE EMC: EN 55011 LVD: EN 61010	
Cooling Method	Fan Cooling	
Operating Temperature	0 - 40°C	
Dimensions (WxHxD)	200 x 95 x 255mm 7.9 x 3.7 x 10 inch	
Weight	2.7kg 6lb	

■ All values are based on the Standard ambient Temperature 25°C and Pressure 0.1Mpa.

■ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE