


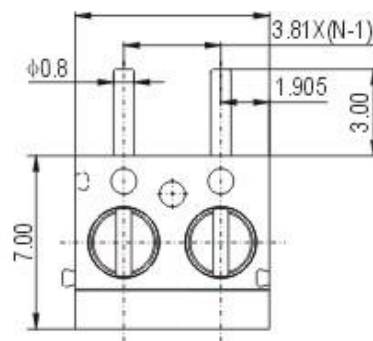


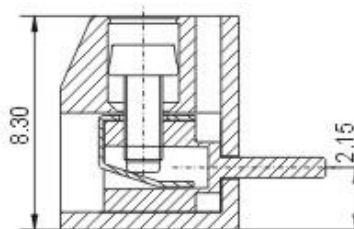

DG340R-3.81

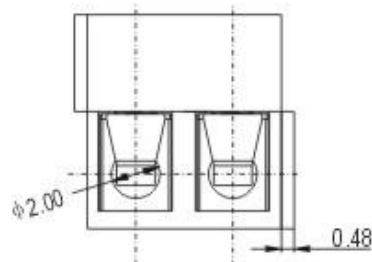

PCB LAYOUT



APPROVAL Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

7A

24-18AWG

AC1250V/1Min

IEC

130V

10A

1.0mm²

Menchanical

torque

Ambient temperature

Strip length

Dimensions

pitch

Poles

0.2Nm(1.7Lb-In)

-40°C~+105 °C

5-6mm

3.81mm(.150")

2P,3P-24P

Material

Housing

Screws

Pin header

Wire guard

PA66,UL94V-0

M2,steel, Cr³⁺ Zn-plated

Brass,Tin plated

Phosphor bronze

HOW TO ORDER :

DG340R-3.81

P

1

X X X
Customer Request


Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



DEGSON ELECTRONICS CO., LTD.

NAME

DG340R-3.81