

Capable of using wheels / discs for AC grinders



10,000 rpm



Easy-to-grip,
small circumference
motor housing



Soft grip for enhanced hand comfort

Warning
lamp



Electronic current limiter (with warning lamp)


Protects motor from overheating with auto-cut off function in case of continuous operation with overloaded.

Anti-restart function (with warning lamp)


No start up if battery is inserted with slide switch is ON.

When overloaded, protect motor by letting operator know with warning lamp

Electronic current limiter process

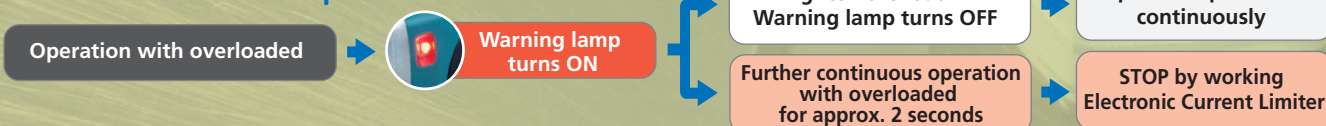


Anti-restart function process




Efficiency of concrete cutting

Test conditions : Cut concrete to depth of 5 mm.

Time required to cut 600mm

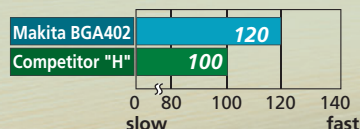

Total cut length on a single battery charge

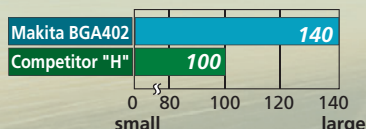

Numbers in the charts above are relative values when setting Competitor "H" capacity as 100. It may differ under some conditions.

Accessories

Rubber pad 76
Part No. 743009-6



Wheel cover

For wire bevel brush
Part No. 192412-2



Sanding lock nut
Part No. 224502-4



For wire cup brush
Part No. 192454-6



For cut-off wheel
Part No. 192626-3



Base ass'y
Part No. 123059-1



For dust collection
Part No. 192475-8



Cordless Angle Grinders



18V 3.0Ah LITHIUM-ION



Carrying Case

BGA402 100mm (4")

430

Capacity

Depressed center wheel: 100mm (4")
Abrasive disc: 100mm (4")
Diamond wheel: 100mm (4")
No load speed: 10,000rpm
Dimensions (L x W x H): 317 mm x 118mm x 118mm
(12-1/2" x 4-5/8" x 4-5/8")

Net weight

1.9kg (4.2lbs)*

Voltage

18V

*without Wheel, Wheel cover, Inner flange and Lock nut

Standard Equipment

Fast Charger, Battery Cartridge, Depressed Center Wheel, Lock Nut Wrench, Side Grip

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23354-2 AI-AH