

LEDVANCE DOWNLIGHT S

LED under cabinet lights



- Energy-saving recessed furniture luminaire
- Can be used as replacement for 20 W low-voltage halogen applications
- Fits into 16 mm shelving and kitchen cupboards with standard 8 mm cable ducts
- Wide spectrum of applications


Product benefits

- Particularly small dimensions
- Shallow mounting depth
- Simple installation using the classic side holes in the shelves
- Variable installation possibilities
- Emits less heat than classic halogen luminaires

Product features

- Mounting diameter: 68 mm
- Ring colors in white matt or anodized aluminum
- Color temperature: 3,000 K (Warm White) or 4,000 K (Neutral White)
- Direct connection to a 220...240 V AC supply



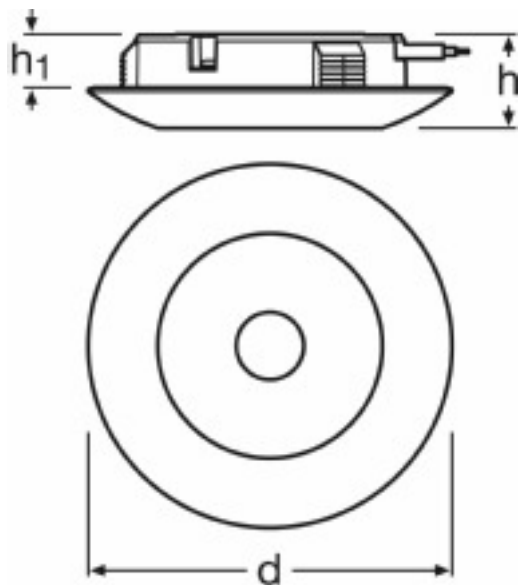

Product line drawing

LDV DOWNLIGHT S 830 L80 AL | LDV DOWNLIGHT S 840
L80 AL | LDV DOWNLIGHT S 830 L80 WT | LDV DOWNLIGHT
S 840 L80 WT

Technical data

Product description	Type of installation	Number of lighting outlets	Nominal wattage	Color temperature	Beam angle	Mains frequency
LDV DOWNLIGHT S 830 L80 AL	Recessed mounting	1	7.00 W	3000 K	80 °	50 Hz/60 Hz
LDV DOWNLIGHT S 840 L80 AL	Recessed mounting	1	7.00 W	4000 K	80 °	50 Hz/60 Hz
LDV DOWNLIGHT S 830 L80 WT	Recessed mounting	1	7.00 W	3000 K	80 °	50 Hz/60 Hz
LDV DOWNLIGHT S 840 L80 WT	Recessed mounting	1	7.00 W	4000 K	80 °	50 Hz/60 Hz

Product description	Length	Width	Diameter	Height	Body material	Product color
LDV DOWNLIGHT S 830 L80 AL	88.0 mm	88.0 mm	88.0 mm	13.0 mm	Aluminum	Anodized
LDV DOWNLIGHT S 840 L80 AL	88.0 mm	88.0 mm	88.0 mm	13.0 mm	Aluminum	Anodized
LDV DOWNLIGHT S 830 L80 WT	88.0 mm	88.0 mm	88.0 mm	13.0 mm	Aluminum	White
LDV DOWNLIGHT S 840 L80 WT	88.0 mm	88.0 mm	88.0 mm	13.0 mm	Aluminum	White

Product description	Equipment	Equipped with lamp	Adjustable	Type of connection	Protection class	Type of protection
---------------------	-----------	--------------------	------------	--------------------	------------------	--------------------

LDV DOWNLIGHT S 830 L80 AL	LED OSLON	Yes	No	Connector	insulation class II (safety insulation)	IP21
LDV DOWNLIGHT S 840 L80 AL	LED OSLON	Yes	No	Connector	insulation class II (safety insulation)	IP21
LDV DOWNLIGHT S 830 L80 WT	LED OSLON		No	Connector	insulation class II (safety insulation)	IP21
LDV DOWNLIGHT S 840 L80 WT	LED OSLON	Yes	No	Connector	insulation class II (safety insulation)	IP21

Equipment / Accessories

- Equipped with OSOLON LED from OSRAM

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.